



JEANS TECHNOLOGY  
Vibemac Know-How


Step Sequence 16




Step Sequence 17



Step Sequence 18A






Step Sequence 19A



Strong, fast, precise, consistent in the stitch length even on the thickest parts!

The 2261H is a reverse-arm lap felling unit, 3 needle chain stitch, for double lap seaming on jeans, casual trousers, work clothes and denim clothes in general. This machine is particularly suitable to sew back yoke, back rise, inseam and outseams, plus top stitch operations. Does not have rivals also when used for shirts.

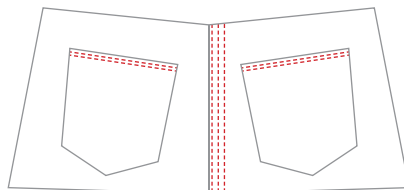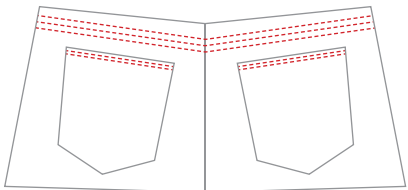

## Technical Features

A special belt puller grants very fast feeding and perfect matching between the sewn parts.

After the sewing, the puller device is like a guide for the chain coming out. It will control and guide the chain into the chain cutter device.

In terms of productivity, 2261H can work at 5200 rpm, this high speed can be achieved only thanks to several outstanding features, like oil feeding lubrication, design and construction quality, puller device and a special sensor for the dynamic pressure presser foot control (DCP system).

The above mentioned DCP system avoids all the skip stitching troubles also on the crotch double thickness, the most critical point for every feed of the arm machine existing in the market.

Other important features are the hoovered chaincutter which allows the operator to work in a clean environment and the one leg adjustable stand which allows the operator to work at the preferred height.

The machine's features can be listed as follow:

- **Always High And Constant Quality:**

thanks to the special & patented DCP system, the stitching length will be constant and the operator's job much easier (no need to pull/push to match 2 parts)

- **Higher Production:**

the unit's speed (5200 rpm) associated with the smart puller system allows a production incomparable in the market, up to 5 inseams in 1 minute!

- **Great flexibility:**

different needle gauges grant maximum flexibility, the machine is provided to sew heavy materials but it is also possible to modify it by purchasing the light fabric kit



PNEUMATIC TRIMMING DEVICE

## Technical Specifications

*Max Sewing Speed:* 4999 rpm

*Stitching Length:* from 0,9 to 4,5 mm

*Standard Needle Gauge:* 1/4" (6,4 mm)

*Optional Needle Gauge:* 9/32" (7,2 mm) - 3/8" (9,6 mm) - 1/4" + 1/8" (MIX 9,6 mm)

*Sewing Machine Motor:* XCG 754 20Y

*Power Requirement:* 220V Single-Phase 50/60

*Sewing Head:* Vi.Be.Mac. 3 needles chain stitch

*Control Box:* XCG MFY 2007

*Gross Weight:* 130 kg  
*Fumigated Recycled  
Packing Dimension*

